
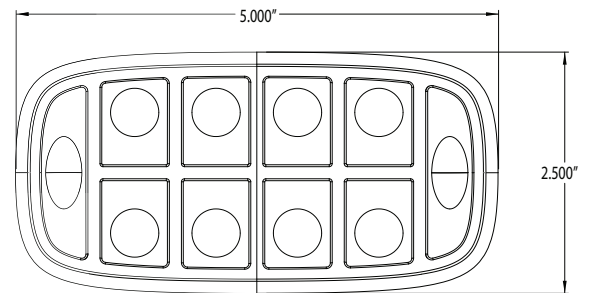



POWERKEY ULTIMATE 1000

Learn more at www.hmisystems.net

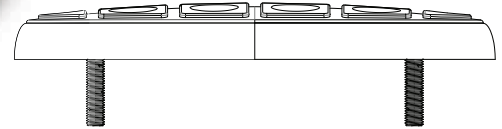

PKU1000 Standard Features

- Supply Voltage 12-24V
- 10 soft rubber molded buttons
- 8 center keys each with 3 RGB indicators - (colors controlled by CAN message)
- 2 side keys each with 2 RGB indicators - (colors controlled by CAN message)
- Total of 28 RGB indicators for entire keypad
- Each key has separate high bright white backlighting LEDs with global intensity dimming
- Laser etched icons and text for each button
- Custom painting of individual button regions
- Improved thermal dissipation
- Sealed IP68
- CAN J1939 / RS-485 Protocol compatible
- Legacy Firmware support for previous installations
- CRM firmware for simplified CAN configuration using HMI Software utilities
- ECS firmware for user programmable features using C based scripting language
- Connector options include Deutsch, Amphenol, M12, or custom requests

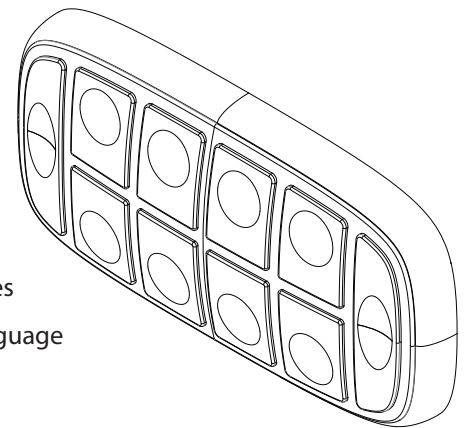

1955 West State Rd 426 | Oviedo, FL 32765 | Tel: 407.359.8171 | Fax: 407.359.8170
info@hmisystems.net | www.hmisystems.net