

POWERKEY ULTIMATE Mini 2300

Learn more at www.hmisystems.net



PKU Mini Keypad

Standard Features:

- Supply voltage 12-24v
- Relegendable buttons
- Multicolor indicator rings
- Vertical or horizontal mount
- Improved thermal dissipation
- Full color LED indicators including pure white
- Standard and custom legends (no mins, no set up fees)
- Added overload feedback on output drives to detect short circuit or over current events
- Significant power reductions, PKU mini consumes with all LED's active 123mA@12v
- Simplified CAN messaging using our CANconnect software to control multiple LED's within single message
- Brighter LED's
- LED backlit icons
- Sealed IP68
- CRM or Designer

PKU Mini Keypad

Improved Features with the Designer Firmware:

- 256 step brightness control for each color
- New LED visual effects (blink, pulse, spin ripple)
- On / Off, momentary, toggle, scroll / step functions programmable for each key
- Autonomous operation (key press causes LED to change state without feedback from external device)
- NMEA2000 bus compliant (support ISO requests, address claim, binary status 127501 and binary control 127502 messages)



PKU Mini Keypad

Protocols & Accessories:

- Optional Bezels
- Optional Finger guards
- RS485
- Free Software Utility
- CANopen
- Accessories Catalog
- J1939
- Connector options include:
- NMEA2000
- Deutsch, Molex and more




REV. 7.18

1955 West State Rd 426 | Oviedo, FL 32765 | Tel: 407.359.8171 | Fax: 407.359.8170
info@hmisystems.net | www.hmisystems.net

 **HMI SYSTEMS**

POWERKEY ULTIMATE

Mini 2300

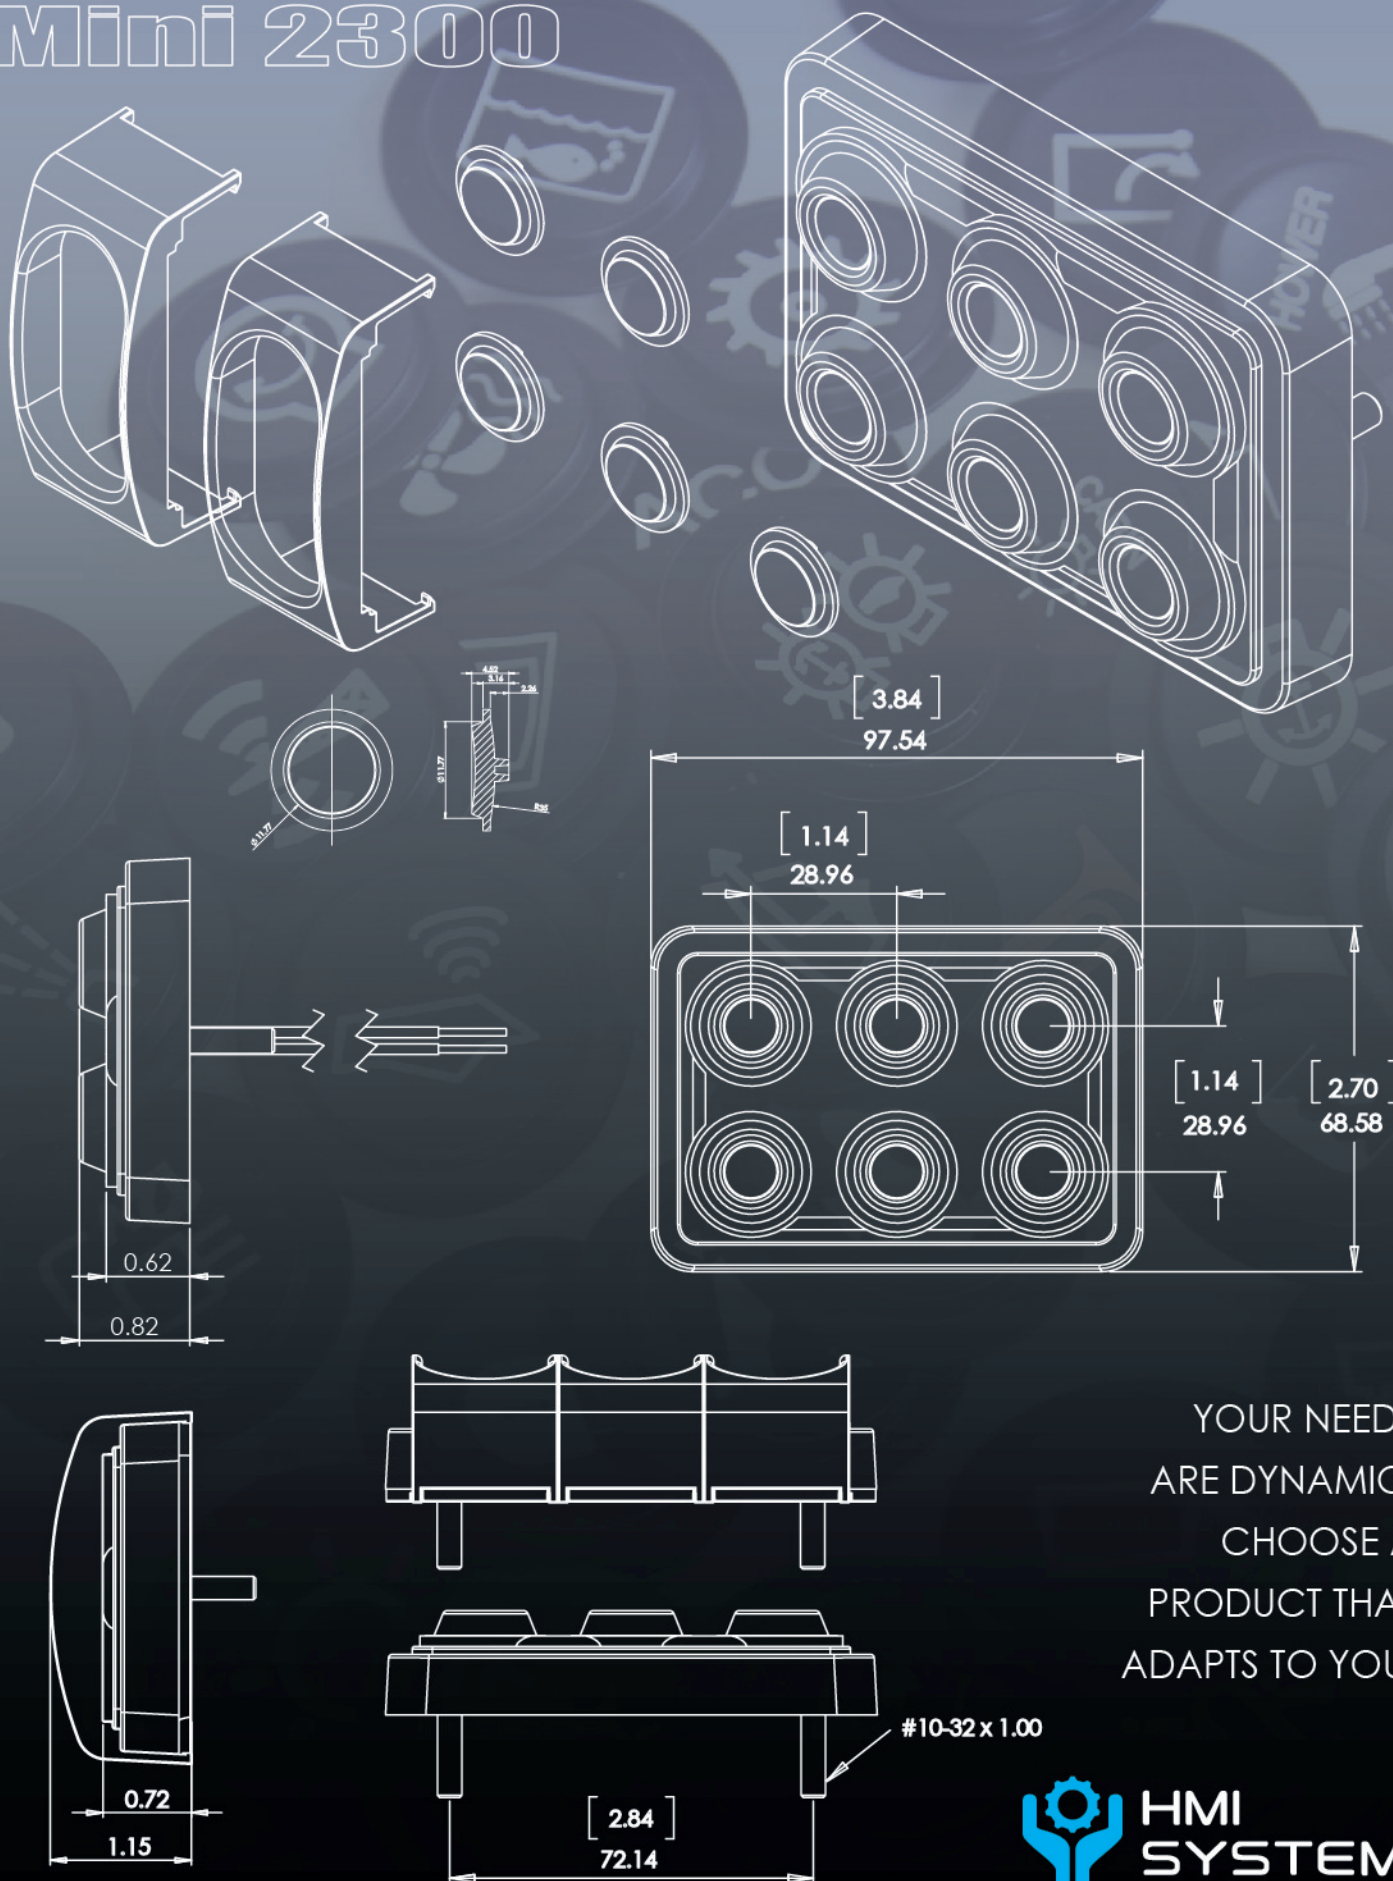

YOUR NEEDS
ARE DYNAMIC,
CHOOSE A
PRODUCT THAT
ADAPTS TO YOU.

